
Mubux series 851

rigid thermoplastic materials. Applications:

Assembly: by pressure.

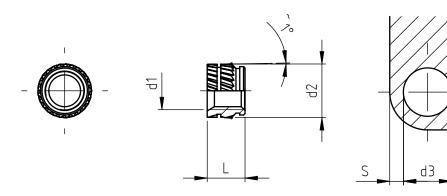

codce	metric thread	external diameter	total length	hole diameter	minimum wall thickness
	d1	d2	L	d3	S
851 0030.80	M 3	4,6	3,0	4,0	2,3
851 0040.80	M 4	6,3	4,0	5,6	2,5
851 0050.80	M 5	7,1	5,0	6,4	2,7
851 0060.80	M 6	8,7	6,0	8,0	3,0

Non binding dimensions, expressed in mm.

For a correct usage of the product it is advisable to carry out some preliminary assembling tests to determine the correct hole diameter.

Standard On demand



chemical-concepts.com 800.220.1966 410 Pike Road • Huntingdon Valley, PA 19006

Material: brass

Finishing: natural

Tolerances: ISO 2768 - m

ISO 6 H Threading:



T/pecialin/er

www.specialinsert.it - export@specialinsert.it

Headquarter and Export department: Via Monfalcone 144 - 10136 - Turin - IT - Tel. +39.011.700301 - Fax +39.011.702947 Milan branch: Via E. Cialdini 37 - 20161 - Milan - IT - Tel. +39.02.646.8476 - Fax +39.02.662.00275

Production and purchase departments:

Via E. Pavanello 1 - 30030 - Maerne di Martellago (Venice) - IT - Tel. +39.041.503.0100

Fax +39.041.503.0110

N PARTIAL. TO THIRD PARTIES, A AUTHORIZED BY SPECIALINSERT.

ARE I

+